Previous references.
Rho 6381-92 D) 8-3-1912
Sam 250-07-33
3930-42 1916.
Sam 189-05-15 D) 14-11-1906.
Later references. (Lamy)

File No. 37-16

Serial Nos. 1-18

GENERAL AND REVENUE SECRETARIAT.

Serial Nos. Jeu

Part B for January 1920.

SUBJECT.

Construction of Head & Camp sheds for Anekal Town.

D 36/1.(2)

W D 1250—GPB—30,000 - 28-1-19

18/3/20.

R. S. 11] 1916.-17

GENERAL AND REVENUE SECRETARIAT.

(Sanitary)

NOTES.

File No. 37. 16

FILE HEADING.

Construction of Health camp sheds for Sunkal town

From

The Sanitary Commissioner

No. 16 C/146 Dated 4. 9. 16 Received 5. 9. 16

Diary No. 816	Enclos.	Spare Copies.	Serial No. 1

BRIEF ABSTRACT OF LETTER.

Requests sanction to a grant-in-aid of Rs 3,000/- being allotted from the plague grant for the current year, for the construction of Health camps in the Sunkal town.

NOTES AND ORDERS.

helpless women & children only vide para 3 of the G.O. 48

1) The proposal of the Sanitary Commissioner for the construction of sheds at Govt. cost for the use of the poor people to move out on the first appearance of plague has been approved in Govt. pro. No 3930-42 & 14th Nov 1906. Sani/89-05-15

2) Submitted with draft for approval or other orders.

5/9/16

NOTES—First Sheet.

7/9

General and Revenue Secretariat. | Sm File No. 37 of 1916-17

Serial No.

3)

2. Please call for returns — to the No. of Sheds to be built, their approximate Cost & whether the Entire Cost is to be met by Govt. or from any other source as well & What the Cost of up keep will come to & Whether the Municipality have agreed to bear it

8/9-16

4)

Draft submitted

11.9.16

5) 7 June

-2. Bc do the Sanry Comr No 19473/16/16 12/9-16

12/9 Requests him to furnish information on certain points.

3 To The Sanitary Commissioner
No G. C 54-14 & 30. 4. 18

States that the question of the Construction of a health Camp for the Anekal town may be considered along a general scheme for providing similar facilities in all other towns in the Bangalore dist and further states that a type design with estimate of cost is under preparation and will be submitted to Govt after completion.

6) If approved, the papers may be filed.

3/5

7) Record him at the end of this

NOTE—Contn. sheet.

GPB—70,000—17-12-15

General and Revenue Secretariat.

File No. 37 of 1918-19.

Serial No.	
4.	From the Sanitary Comr, No C.C. 294 of 26.11.18 — Submits type designs & estimates promised in Pl 3 above & proposes that 200 copies of the plans & estimates may be printed at the Govt Press & distributed to the local bodies to facilitate consideration of the matter by Mil Councils & Dt Bds under instructions rcyd in G.O. No 5730-46/Mil 16-7)-57 of 9.4.18 & that the Kannada transn of his offi circ No C.C. 434-27/28.5.18 hereto sent, may also be printed & distributed. S. Submitted for orders.

The Sanitary Commissioner first applied for a grant in aid of Rs 3000 for the construction of pucca latrine ramps for Animal Dung. Subsequently he suggested that the question may be considered along with the general scheme for providing simple latrines in all towns in the Dt. A type design & estimate is now submitted, and prays that the design & estimate may be sanctioned & 200 copies may be got printed & distributed to the Local Bodies & Municipalities for consideration. He also requests permission to get certain Kannada Circulars printed for circulation. The circulars refer to the plague prevention measures. He has also requested to be given instructions as to what portion of the cost is to be borne by the Mil & Local Boards. The question

NOTE—Contn. sheet.

WD A 1789—GPB—60,000—20-8-18—S.

General and Revenue Secretariat. Sanj File No. 37 of 1916.

Serial No.	
	upkeep should be borne entirely by the Municipal Boards concerned.
	Eg 6/12
167 6-12-18	Secd Member
	(10) Copies of plans & estimates may be supplied immediately to Dist Hdqrs & Taluk Hdqrs Inspectors
	6/12
	E.I.
	(11) Draft submitted. Eg 13/12
	(12) Issue Eg 13/12
5	To The Dist Govt Press. Proc 1634 D/16-12-18 Requests that 200 copies each of the plans designs and estimates may be printed and supplied to this office very early
6	From the same. No. 1466 d/23-12-1918 Returns the type designs & requests that the original or duplicate copies in black ink may be sent.
	(13) If approved, the Sanj Council will be asked to send up the originals.
	14) Eg

18 DEC 1918

NOTE—Contn. sheet.

WD A 1789—GPB—60,000—20-3-19—S. 1·19

General and Revenue Secretariat. | Sanry File No. 37 of 1916. 13915

Serial No.	
	15) Draft – subd with refce to para 14. SGR 9/1 Issue SWH
7	To The Sany Comr No 4292 dd 13.1.19 Returns the tracing and requests to forward the tracing a block ink as that received was not suitable for tracing.
8	From / The Sany Comr No GC 294-3 dd 28.3.19. Forwards a duplicate copy Drawn on tracing cloth, of each of the type designs for health + Contract Hosps. 16) Submitted with a draft to Supdt, Govt Press. 2/4 J Jones Dftsm. 15/4
9.	To The Supdt Govt Printing No 24192 dd 22/4.19 Requests that 200 copies of each may as already requested be printed + supplied to this office when ready + Acc. 17) 200 copies of the plans and estimates have been received from the Supdt. Govt Press, and a draft to the Sanitary Commissioner

NOTE—Contn. sheet.

WD A 1789—GPB—60,000—20-3-18—S.

General and Revenue Secretariat.

Secy File No. 37 of 1916

Se No.

forwarding 150 copies for distribution to St Boards and Taluk Hd. Qr. municipalities, is herewith submitted for approval, with reference to para 10 above.

2945 18-12-19

2-12-19. 2/12

Secd Secretary 30/12

To the Secy Comm [illegible] 31/12

Request to circulate the printed Copies to all St Boards and Taluk Hd Quarter Municipalities for necessary action.

CHIEF [illegible] PROTECTION BRANCH 30 JAN 1920

NOTE—Contn. sheet.

No. G. C. 14 Dated, Bangalore, 4 Septr., 16.

From

Rao Bahadur Rajakarya Pravi.
T.V.Arumugum Mudaliar Esq., M.B.C.M.,
Sanitary Commissioner to the Govt., or
H.H.the Maharaja of Mysore. Bangalore.

To

) Narasinga Rao Esq., B.A., B.L.,
Secretary to the Government of H.H.th
Maharaja of Mysore, General Deptt.,Bangalore.

Sir,

I have the honor to submit herewith for the information of Government copies of correspondence ending with letter No.R.755 dated the 30th ultimo from the Deputy Commissioner, Bangalore District, on the subject of the measures for the suppression of Plague at Anekal and to request that you will be so good as to obtain the sanction of Government to a grant-in-aid of Rs.3,000/- being allotted, out of the provision of Rs.30.000/- in the current year's budget under plague charges, for the construction of a Health Camp for the Anekal town. The population mostly consists of weavers - many of whom still reside in the town, plague notwithstanding. I am convinced that unless a Health Camp is maintained here, as in the Bangalore City but on a relatively smaller scale, this community would never resort to prompt evacuation on the outbreak of plague. Year after year, plague exacts a heavy toll from the town and spreads thence into the surrounding villages. The provision of substantial sheds so as to be available for occupation at a moment's notice would help in getting the almost annual visitations of plague under control at the very onset of the disease. I might add that preventive measures adopted for taluk head quarter towns are really, though indirectly, steps taken to combat plague in

the

Very Urgent

GEN. & REV. SEC. 19 SEP 19

GPB—12,000 - 8-7-15

191

From The Sanitary Commissioner in Mysore Bangalore

To The Secretary to Govt Genl : Dept Bangalore

Dated 4.9.16

Despatched

Received

General No. G c 146

No.

Enclosure No. One

Re the Construction of a Health Camp for the Anekal Town.

the taluk as a whole and for this reason the cost of the construction of the proposed Health Camp is a legitimate charge on the general revenues. The charges incidental to he up-keep of the structures must be borne by the Municipality.

2. The type of sheds and the general design of the Health Camp will, of course, be approved by the Sanitary Department before work is actually ~~be~~ started.

I have the honor to be,

Sir,

Your most obedient servant,

Sanitary Commissioner.

INSPECTION NOTES OF ANEKAL

Visited Anekal on the 13th instant in connection with the recent outbreak of Plague; went round the town with the local Sub Assistant Surgeon, the Police Inspector and the Municipal Staff and saw six cases of Plague, five Bubonic and one Septic - The Plague cases were among the very poor inhabitants of Anekal who were not able to find accommodation outside the town and too poor to put up good sheds with water-proof roofing - advised the contacts to get themselves inoculated and to obtain treatment for their sick relations from the Sub Assistant Surgeon of the Local Fund Dispensary.

A large number of houses of the well-to-do classes are evacuated, their occupants having gone into the villages all round Anekal, carrying infection with them and most of the villages in the Anekal Taluk are Plague infected.

--ooOoo--

No.C.280 dated 26-8-16, from the Sanitary Commissioner in Mysore, Bangalore, to the Deputy Commissioner and President, District and Municipal Boards, Bangalore District.

In enclosing herein an extract from the notes of my recent inspection of the Anekal Town, I have the honor to suggest that you will be so good as to arrange for the supply of shed materials to the towns-people and, in the case of very poor, for the actual construction of sheds a Government cost, in lieu of the mere supply of hutting materials. (Vide Para 3 of Government Order No.3930-42 Sany 189-05-15 dated the 14th November 1906).

2. I think it is also necessary to take steps to prevent people shifting to neighbouring villages carrying infection

direction may not be possible I am convinced that if a Health Camp similar to the one in the Bangalore City (and of course on a proportionately smaller scale) were provided, the facility thus created would tend to keep the people from migrating into surrounding villages during times of Plague. Such an arrangement is necessary for all Municipal towns and I know of no better use to which grants-in-aid from Plague funds can be put than this.

--ooOoo--

No.R.755 dated 30-8-16, from the Deputy Commissioner, Bangalore District, to the Sanitary Commissioner in Mysore, Bangalore.

With reference to your letter No.C.280 dated the 26th instant re the Plague preventive measures at Anekal, I have the honor to state that the Amildar has been instructed to arrange with the Forest Department to take the supply of the required shed materials for the use of poor who are in need of them

2. With regard to your suggestion for the construction of a Health Camp similar to the one in the Bangalore City, I beg to state that I am quite aware of the desirability of making some arrangements of the kind, and action has been already taken by me in this respect at the time of my inspection of the town with the District Medical and Sanitary Officer last month. But the chief difficulty against the construction of a Health Camp is want of funds. The Municipality has no money at its credit, and unless the required money can be found from Plague funds it is not possible to achieve successful results.

I shall be obliged if in the circumstances you will kindly let me know if sanction can be obtained for a sum of Rs.3000/- being granted to the Municipality for the purpose from Plague funds

--ooOoo--

Copies

Sanitary Commissio

G. R. S. 26]

File No. 37.16

Serial No. 1

Diary No. of letter replied to 816

No. 1947
San 37-16-2
9/16.9.16

General Revenue Secretariat
Sanitary
, the 191 .

To

The Sanitary Commissioner
Sir,

Date of issue 18.9.16

Signed by W.B. Sakhuram

With reference to your letter No. C 146 dated the 4th September 16 requesting sanction for a transfer of Rs 5000/- from Bluerun funds for the construction of Health Camps in Anekal town, I am directed to request you kindly to send on the furnish information on the following points:-

The number of sheds proposed to be built and their approximate cost,

over. (2)

SUBJECT.

(2) ~~Whether~~ the future Cost is to be met from ~~State~~ funds or from any other source as well & (3) the Municipality Cost of the Water Works & Whether the Municipality have agreed to bear it.

The San. Com. has already dealt with

I have to
[illegible]
[illegible]
General Dept.

Copied by

Examined by

GPB—20,000—10-10-14

D 22751
Sani 37-16 Sl 3

with the Government of His Highness
the Maharaja of Mysore,

Dated, Bangalore, 30th April 1918

From

M. Srinivasa Rau Esquire., M.A., M.D., B. SC., (Edin)
D. P. H., (Cantab) & F. C. S., (London.)
Sanitary Commissioner with the Government of His Highness the Maharaja of Mysore, Bangalore.

C. S. Balasundaram Iyer Esq., B. A.

Chief *Secretary to the Government of His Highness the Maharaja of Mysore,* ..... *Department,*
BANGALORE.

Sir,

With reference to your letter No. 1947 Sany. 37-16-2 dated the 16th. September 1916. I have the honor to submit herewith copy of letter No. C. 1260/ L.F. dated the 4th. Instant from the Deputy Commissioner, Bangalore District, proposing that the question of constructing health camps at Anekal may be treated as part of a general scheme for providing similar facilities in all other towns in the district A suitable type design with estimate of cost is under preparation and will, as desired, be furnished to the Deputy Commissioner, a copy being at the same time submitted to Government for information.

I have the honor to be,
Sir,
Your most obedient servant,

M Srinivasa Rau
~~For~~ Sanitary Commissioner
(~~absent from station~~)

19 1 MAY 1918

From

The Sanitary Commissioner
in Mysore, Bangalore.

To Chief

The Secretary to the Government
of H. H. the Maharaja of Mysore,
~~*Department*~~
Bangalore.

Dated 30-4-18

Despatched

Received 11146

General No. G.C 574-14
No.

Enclosure No. One

SUBJECT.

Stating that the question of the construction of a health camp for the Anekal town may be considered along with a general scheme for providing similar facilities in all other towns in the Bangalore district.

Refer

Letter No. G. 1260/L. F dated the 4/5th. April 1918 from the Deputy Commissioner, Bangalore District, to the Sanitary Commissioner in Mysore.

Adverting to correspondence ending with your letter No. 54-10 dated the 26th. March 1918. regarding the construction of Health Camps at Anekal, I have the honor to state that no town in the District has been provided with facilities for adopting measures to combat the spread of plague whenever it breaks out Beyond evacuation, disinfection and inoculation no other measure is adopted. If important towns are provided with Epidemic Disease Hospitals with a sufficient number of Health Camps it would, no doubt, serve to prevent the spread of infection but the local bodies will, I am afraid, not be in a position to incur the heavy initial expenses needed for the purpose. Suitable grants-in-aid will have therefore to be given from State funds. Before definite proposals could be submitted in the matter, it is necessary to inform the local bodies the approximate cost of such buildings, their equipment and up-keep. If you will kindly furnish me with this information together with type-designs of buildings suitable for the purpose, I shall obtain the views of Municipal Councils and send up definite proposals for all towns in the District. The requirements of Anekal town may be considered along with those of others.

'C o p y'

For Sanitary Commissioner.

with the Government of Mysore,

No. G.C.294 Bangalore, Dated the 26th November 1918.

From

M. Srinivasa Row, Esq., M.A.M.D.E.,Sc.,Etc.,
Sanitary Commissioner in Mysore,
Bangalore.

DIARY No. 8732
13
37-16-4

To

C. S. Balasundaram Iyer, Esq., B.A.(Hon)
Chief Secretary to the Government,
Bangalore.

Sir,

In continuation of the correspondence ending with my letter No. G.C. 54-14 dated the 13th April 1918, I have the honour to submit herewith a copy of each of the type designs and estimates for health and contact sheds.

2. As the Deputy Commissioner, Bangalore District proposes taking up the consideration of the question of providing health camps for Anekal town along with the general scheme for providing such camps for all other towns in the District, and as the subject has to be considered by all municipal Councils and District Boards under the instructions conveyed in Government Order No. 5730-46 Mil 16-17-57 dated the 9th April 1918, propose that 200 copies of the plans and estimates may be printed at the Government Press and distributed to the local bodies to facilitate consideration of the matter.

3. A Kanarese translation of this office circular No. G.C. 434-2 dated the 28th May 1918 may also be printed and distributed.

I have the honour to be,
Sir,
Your most obedient servant,
M. Srinivasa Row
Sanitary Commissioner.

WD 02785—GTB—, 79,000—25-2-17—S

15971 191

From

The Sanitary Commissioner
to Singapore

To

The Chief Secretary to Govt
of Singapore.

Dated 28.11.18

Despatched

Received

General No. G.C 294

No.

Enclosure No. 5

Submitting a Copy of each of the typhe designs & Estimates for health & Contact Sheds



G. R. S. Vl—G/32]

SUBJECT.....

.....

.....

Diary No. of letter replied to 7205.

GENERAL AND REVENUE SECRETARIAT

. the 191 .

Section Law
File No. 37-76.
Serial No. 5

No. S 11634
Encls

Date of issue 16.12.18

Signed by Mr. S.S.Jr

To

The Supdt, Govt Press,
Bangalore

Sir,

I am directed to request you to be so good as to cause 200 Copies each of the type designs & estimates for Leather and Contacts sheds in the Bangalore Dest and a Kannada Circular (Re. G.C 434-28/28.5.18) received from the Dany. Comrs in Mysore, printed and supplied to this office at an early date.

I have &c,

for Chief Secy

WD 2142—GPB—1,000—9-5-15

No. 1466.

OFFICE OF THE SUPERINTENDENT,
GOVERNMENT PRESS,
Dated Bangalore, 23rd December 18.

18761

FROM

D. B. RAMACHANDRA MUDALIAR, ESQ.,
SUPERINTENDENT, GOVERNMENT PRESS,
BANGALORE.

To

C. S. Balasundaram Iyer, Esq., B. A.,
Chief Secretary to the Government of Mysore,
BANGALORE.

SIR,

In returning herewith the copies of Type designs forwarded with your letter No. G. 11634 dated the 16th instant for being printed, I have the honor to request that as the type designs on blue paper are not visible for tracing, th original or duplicate copies thereof in black ink may kindly be caused to be sent to this office for the needful being done.

I have the honor to be,
Sir,
Your most obedient servant.

Superintendent,
Government Press.

G. R. S. VI—G/32]

SUBJECT.

Diary No. of letter replied to 8529

Section Sa
File No. 37-16
Serial No. 7

GENERAL AND REVENUE SECRETARIAT,
(Sany)
, the 191 .

No. G/42922
Encls 2

Date of issue 21/12/19

To
The Sanitary Commr
in Mysore

Signed by

Sir,

In returning herewith
the copies of type designs c
blue paper forwarded with your letter No
G. 6. 294 d/ 26/30 th Nov 1918,
I am directed ~~to observe tha~~
~~they are said to be not visibl~~
~~for tracing~~, and to request
that you will be so good
as to forward ~~to Govt~~ the

over. Orderin

13

riginal or duplicate copies

hereof in black ink, as the type is then

n questions are reported to be not suitable for

I have &c

CMH

for Chief Secy

SAB
9/11
hr

List of enclosur

Copied by

Examined by

WD 86—GPB—60,000—15-11 16

Department of Public Health in Mysore. 90

OFFICE OF THE SANITARY COMMISSIONER
WITH THE GOVT. OF MYSORE.

Bangalore, dated the 28th March 1919.

No. G.e 294-3
Enc. 2

From

A. K. PANI, Esq., D.P.H., etc.
Offg. Sanitary Commissioner with the Government of H. H. the Maharaja of Mysore, BANGALORE.

To

C. S. Balasundaram Iyer, Esq., B.A.,

Chief Secretary to the Government

Bangalore.

Sir,

With reference to your letter No.G. 14292 Sany. 37-16-7 dated the 13th January 1919, I have the honour to submit herewith a duplicate copy drawn on tracing cloth each of the type designs for health and contact camps.

have the honour to be,
Sir,
Your most obedient servant,

Offg. Sanitary Commissioner.

From The Offg. Sanitary Commissioner
to the Govt.
Bangalore

61343

To The Chief Secretary to
Government
Bangalore.

Dated 28th March 1919.

Despatched

Received

SEC. & REG. BRANCH
29 MAR 1919

General No. G. C. 294 - 3
No.

Enclosure No. Two

Forwarding a duplicate copy on tracing cloth of each of the type designs for health camps

Rev
29/3/19
2913 Rev

G. R. S. VI—G/321

21

SUBJECT

Diary No. of letter replied to 13915

Section San
File No. 37-16
Serial No. 9

GENERAL AND REVENUE SECRETARIAT

, the 191

No. G.R.S.(2)

Date of issue 22/1/19

Signed by M. Rice

To

The Supt, Govt Printing,
Bangalore

Sir,

With reference to your letter No 1466 dated 23rd Dec 1918, I am directed to forward herewith a duplicate Cop. drawn on tracing cloth, of each of the type designs for Health & Contact Camps & to request that 200 copies of each may, as requested in this office letter No G.11634/San. 37-16-5 dated 16.12.18, be printed & supplied to this office at an early date.

I have &c.
M. Rice
for Chief Sec.

83/5/14

ESTIMATE FOR HEALTH AND CONTACT SHEDS.

The probable cost of constructing a contact shed as per plan No. C.

Item No.	Description of work	No.	Measurement in feet L.	B.	D.	Quanti
	EARTHWORK EXCAVATION FOR FOUNDATION.					
	Walls all around the building ...	1	86½	2½	2	432
	Cross walls ...	2	9	2	2	72
	Retaining walls for the verandah all round the building.	1	136½	2	2	546
	Steps ...	1	6⅜	2¾	½	8
	Total earthwork excavation for foundations in c. feet.	...	...	...	...	1,0
	BURNT STONE IN CLAY FOR FOUNDATION AND BASEMENT.					
	Quantity for foundation is same as for excavation in c. ft.	...	...	...	...	1059
	Basement—					
	Walls all round the building ...	1	86½	2	2	346
	Cross walls ...	2	9½	1½	2	57
	Retaining walls for the verandah all round	1	136½	1½	2	409
	Steps ...	1	6⅜	1½	1	9
	Total burnt stone in clay for foundations and basement in c. ft.	...	...	...	...	1881·1
	Deductions—					
	Sill slabs for doors ...	3	4½	1½	⅓	6·75
	Spaces occupied by the pillars ...	20	1	½	1½	15·00
	Total deductions in c. ft. ...	...	...	...	...	21·75
	Total burnt stone in clay for foundations and basement less deductions in c. ft.	...	...	...	...	1,859
	SUPERSTRUCTURE BURNT BRICK IN CLAY.					
	Walls all around the building up to gable...	1	86½	1½	12⅜	1605·7
	Gables (over side walls) ...	2	$\frac{\text{area}}{1\frac{3}{8}\times 3\frac{3}{4}}\times 1\frac{1}{2}=$			73·1
	Cross walls ...	2	10	1⅜	12⅜	27·8
	Gables (over cross walls) ...	2	$\frac{\text{area}}{1\frac{3}{8}\times 3\frac{3}{4}}\times 1\frac{1}{8}=$			54·8
	Total superstructure burnt brick in clay in c. ft.	...	...	...	...	1761·4
	Deductions—					
	Doors ...	3	3	1½	6½	87·75
	Windows (big) ...	3	3	1½	4½	60·75
	Do (big) ...	2	3	1⅛	4½	30·38
	Do small ...	6	2½	1½	4½	101·25
	Ventilators ...	6	3	1½	2	54·00
	Lintels over doors and ventilators ...	9	4½	1½	⅓	20·25
	Lintels and sills for windows (big) ...	3	4½	1½	⅓	6·75
	Lintels and sills for windows big in cross walls.	2	4½	1⅛	⅓	3·37
	Lintels and sills for windows (small) ...	6	4	1½	⅓	12·00
	Wall plates ...	2	33¼	⅓	¼	5·54
	Total deductions in c. ft. ...	...	...	...	...	382
	Total superstructure burnt brick in clay less deduction in c. ft.	...	...	...	...	1,379
	CUT STONE PILLARS (DRESSED) WITH A □R SLIT OF 4″ × 2″ AT TOP FOR BR SUMMER TO REST ON.					
	For the whole building ...	20	1	½	7½	No. 20

The probable cost of constructing a contact shed as per plan No. C.—*contd.*

Item No.	Description of work	No.	Measurement in feet L.	B.	D.	Quantity
5	STONE SLABS FROM 4″ TO 4½″ THICK DRESSED IN ONE SIDE.					
	Lintels over doors and ventilators ...	9	4½	1½	...	60·75
	Lintels and sills for windows (big) ...	3	4½	1½	...	20·25
	Do do in cross walls.	2	4½	1⅛	...	10·13
	Do do small ...	6	4	1½	...	36·00
	Wall plates ...	2	33¼	⅓	...	22·17
	Sill slab for doors ...	3	4½	1½	...	20·25
	Total stone slabs from 4″ to 4½″ thick in sqr. feet.	...	...	...	...	170·
6	JUNGLE WOOD WORK (HONNEWOOD) WROUGHT AND PUT UP, COMPLETE.					
	Common rafters for the building ...	2×16	7¾	¼	5/12	25·83
	Collars for the c. rafters ...	16	6	¼	5/12	10·00
	Wall plates ...	2	33¼	⅓	¼	5·54
	Common rafters for the verandah ...	48	9¼	1/6	¼	18·50
	Hip rafters ...	4	12¾	⅓	½	8·50
	Jack rafters ...	2×4	9¼	1/6	¼	3·08
	Bressummers (all round verandah) ...	1	140	⅓	5/12	19·44
	Total jungle wood work (Honne) in c. ft.	...	...	...	...	90·89
7	DOORS AND WINDOWS MADE OF JUNGLE-WOOD (HONNEWOOD) WROUGHT AND PUT UP COMPLETE WITH HOOKS, BOLTS, ETC.					
	(*a*) Doors ...	3	3	6½	in s. ft	58·50
	(*b*) Windows (big)	5	3	4½	...	67·50
	Do (small)	6	2½	4½	...	67·50
					s. ft.	135·00
	(*c*) Ventilators (glazed) ...	6	3	2	s. ft.	36·00
	ROOFING WITH MANGALORE TILES (2ND CLASS) ON 1″ HONNEWOOD REEPERS.					
	For the whole building (excluding verandah)	2	34	7¾	...	527
	For verandah (front and rear) ...	2		$\frac{33\frac{1}{2}+48\frac{3}{4}}{2}\times 8$		658
	Do (sides) ...	2		$\frac{13+28}{2}\times 8$		328
	Total roofing with Mangalore tiles 2nd class in squares.	...		.....		15·1
9	RIDGE TILES SET IN MORTAR.					
	Building roof ...	1	34	...	...	34·
	Verandah ...	4	9	...	...	36·
	Total ridge tiles set in mortar in R. ft. ...	...	...	...	...	70·
10	CHUNAM PLASTERING OUTSIDE,					
	Walls all round the building up to gable...	1	92½	12 area	...	1110
	Gables ...	2×		½³×4		52
	Total chunam plastering in sq. ft. ...	...		.....		1,162
	Deductions—					
	Doors ...	3	3	6½	...	58·5
	Windows (big) ...	3	3	4½	...	40·5
	do (small) ...	6	2½	4½	...	67·5
	Ventilators ...	6	3	2	...	36·0
	Sills and lintels for windows (big) ...	3	4½			4·5
	Do (small)					8·0

The probable cost of constructing a contact shed as per plan No. C.—*contd.*

Item No.	Description of work	No.	Measurement in feet L.	B.	D.	Quantity
	Deductions—contd.					
	Lintels for doors ...	3	$4\frac{1}{2}$	$\frac{1}{3}$	..	4·5
	Lintels for ventilators ...	6	$4\frac{1}{2}$	$\frac{1}{3}$	....	9·0
	Total deductions in square feet ...	...	...	...	...	228·5
	Total chunam plastering less deduction in sq. ft	...	...	...	...	933 or 9·33sqrs.
11	MUD PLASTERING (INSIDE).					
	Side rooms (walls all round up to gable)...	2	40	$12\frac{3}{4}$	...	1020·0
	Gables((sides) ...	$2\times2\times\frac{\text{area}}{3\times\frac{10}{2}}$				60·0
	Central room (walls all round up to gable)	1	36.	$12\frac{3}{4}$	...	459·0
	Gables (sides) ...	$2\times\frac{\text{area}}{3\times\frac{10}{2}}$				30·0
	Total mud plastering in sq, ft. ...	...	.....			1569·0
	Deductions—					
	Omitted to cover up the cost of plastering joints, etc.	...	...	...	...	...
	Total mud plastering in squares ...	...	...	...	...	15·69
12	CEMENT POINTING FOR BASEMENT.					
	Walls all round ...	1	$140\frac{1}{2}$	2	...	281·0
	Sides of steps ...	2	$1\frac{1}{2}$	1	...	3·0
	Total cement pointing for basement in sq. ft.	...	...	...	...	284·0
	Deductions—					
	Portions occupied by steps in front ...	1	$6\frac{3}{8}$	$\frac{3}{2}$	...	9·5
	Total cement pointing less deduction in squares.	...	..	...	...	2·74
13	CHOCALATE PAINTING, 2 COATS.					
	Doors	3×2	3	$6\frac{1}{2}$	...	117·0
	Windows (big)	5×2	3	$4\frac{1}{2}$	...	135·0
	Windows (small)	6×2	$2\frac{1}{2}$	$4\frac{1}{2}$	...	135·0
	Ventilators	6×1	3	2	...	36·0
	Total chocolate painting in sq. ft.	...	...	...	...	423·0
14	WOOD OILING, 2 COATS.					
	Common rafters (3 sides)	2×16	$7\frac{3}{4}$	$1\frac{3}{12}$	...	268·66
	Collars for common rafters (4 sides) ...	1×16	$7\frac{3}{4}$	$1\frac{1}{3}$	...	165·33
	Common rafters for the verandah 3 sides...	48	$9\frac{1}{4}$	$\frac{2}{3}$	...	296·00
	Hip rafters do ...	4	$12\frac{3}{4}$	$1\frac{1}{3}$	...	68·00
	Jack rafters do ...	2×4	$9\frac{1}{4}$	$\frac{2}{3}$	...	49·33
	Bressummers do ...	1	140	$1\frac{1}{2}$	...	210·00
	Total wood oiling, 2 coats in squares ...	...	...	...	...	10·57
15	COAL TARRING, 2 COATS.					
	Wall plates (3 sides) ...	2	$33\frac{1}{4}$	$\frac{5}{6}$	...	55·42
	Total coal tarring, 2 coats in squares ...	...	...	...	...	·55
16	FLOORING WITH 3″ OF CONCRETE AND CEMENT MORTAR PLASTER 1″ THICK.					
	Side rooms ...	2	10	10	...	200·0
	Central room ...	1	10	8	...	80·0
	Verandah (front and rear) ...	1×2	$45\frac{1}{4}$	6	...	543·0
	Do (sides) ...	1×2	13	6	...	156·0
	Total flooring with 3″ of concrete and cement plaster in sq. ft.	...	...	...	...	979·0

The probable cost of constructing a contact shed as per plan No. C—*concld.*

Item No.	Description of work	No.	Measurement in feet L.	D.	B.	Quantity
	Deductions — Pillar resting space	1×20	1	1½	sq. ft.	10·0
	Total flooring with 3″ of concrete and cement mortar less deduction in sq. ft.	...	...	...	...	969.
17	WHITEWASHING, 2 COATS.		sq. ft.			
	Quantity as per plastering inside and outside	...	1569+	933	=	2502
	(*i. e.*	...	25·02	sq.	roughly	25sqrs.
18	CORNICE, PLAIN					
	For the building (outside) ...	1	92·5	...	...	...
	Total cornice plain in R. ft. ...	...	...	...	...	92·5
19	EAVE BOARDS (PLAIN)					
	For the verandah ...	1	152	...	...	...
	Total eave boards plain in R. ft. ...	...	...	...	...	152

Abstract for the foregoing estimate.

Quantity	Details of work	Rate Rs. a. p.	Per	Amount Rs. a. p.
1059 c. ft. ...	Earthwork excavation and filling in basement.	79 0 0	1000 c. ft	9 8 6
1859 c. ft, ...	Burnt stone in clay for foundations and basement.	20 0 0	100 c. ft.	371 12 10
1379 c, ft' ...	Burnt brick in clay superstructure —	0 2 6	c. ft.	215 7 6
No. 20 ...	Cut stone pillars 6″ ×12″×7½′ with □r slit at top.	5 0 0	Each	100 0 0
170 sq. ft ...	Stone slabs from 4″ to 4½″ thick dressed	0 4 0	Sq. ft.	
91 c. ft. ...	Honnewood work wrought and put up, complete.	2 4 0	c. ft.	42 8 0
58·5 sq. ft. ...	Honne wood battened doors with bolts, etc., complete.	1 0 0	Sq. ft.	234 12 0
135·0 sq. ft. ...	Honne wood battened windows with bolts, etc., complete.	1 4 0	,,	58 8 0
36·0 sq. ft. ...	Glazed ventilators ...	1 12 0	,,	168 12 0
15·13 sq. ...	Roofing with Mangalore tiles (2nd class on junglewood reepers.)	23 0 0	,,	63 0 9
				348 0 0
70 R. ft. ...	Ridge tiles set in mortar ...	0 4 0	R. f	17 8 0
9·33 sq. ...	Chunam plastering fine (outside) ...	2 8 0	Sq	23 5 2
15·69. sq. ...	Mud plastering (inside) ...	0 12 0	,,	11 12 3
2·74 sq. ...	Cement pointing to basement ...	3 8 0	,,	9 9 5
4·23 sq. ...	Painting with chocolate colour, 2 coats...	2 8 0	,,	10 9 2
10·57 sq. ...	Wood oiling (2 coats) ...	2 0 0	,,	21 2 3
0·55 sq. ...	Coal tarring (2 coats) ...	1 8 0	,,	0 13 0
9·69 sq. ...	Flooring with 3″ of concrete and 1″ cement plaster.	4 0 0	,,	38 12 2
25 sq. ...	Whitewashing (2 coats) ...	0 3 6	,,	5 7 6
92·5 R. ft. ...	Cornice (plain) ...	0 6 0	R. ft.	34 11 0
152 R. ft. ...	Eave boards (plain) ...	0 8 0	R. ft.	76 0 0
	Clearing site lumpsum ...	—	,,	10 0 0
	Total ...	—	...	1,841 14 9
	Contingencies at 2 per cent ...	—	...	36 13 5
	Grand Total ...	...	...	1,878 12 2
	Roughly ...	—	...	1,900 0 0

Prepared on 22nd September 1818.

N.B.—This estimate does not take into consideration the fluctuation of the market rate in the prices of materials.

Probable cost of constructing a Health Camp as per plan attached.

Serial No.	Details	No.	Dimensions L.	B.	D.	Contents
1	EARTH WORK—EXCAVATION AND FILLING IN BASEMENT.					
	Walls all round the building ...	1	107½	2	2	430·0
	Cross wall at the centre of building ...	1	9⅛	2	2	36·5
	Cross wall dividing hall (screen wall) ...	2	6 9/16	1¾	2	46·0
	Steps ...	2	3	2 9/16	½	7·7
	Total of earthwork, excavation, etc., in c. yds	...	...	...	...	19¼
2	BURNT STONE IN CLAY FOR FOUNDATION AND BASEMENT.					
	For foundation quantity as above ...	...	...	...	...	520
	For Basement—					
	Walls all round the building ...	1	107½	1⅛	2	322·5
	Cross wall at the centre of building ...	1	9⅜	1½	2	29·0
	Cross wall dividing hall ...	2	6⅝	1¼	2	33·0
	Backing for steps ...	2×2	1	2	¾	6·0
	Total burnt stone in clay for foundation and basement.	...	...	...	...	910·5 c.ft.
	Deductions—					
	Sill slabs for doors ...	2	4½	1⅛	⅜	3¾
	Total burnt stone in clay less deductions for foundation and basement.	...	...	...	...	906¾ c.ft.
3	SUPERSTRUCTURE BURNT BRICK IN CLAY.					
	Walls all round the building (up to gable).	1	107½	1⅛	10 5/16	1247
	Cross walls at the centre do ...	1	10	1⅛	10 5/16	116
	Cross wall dividing wall do ...	2	7	6	¾	63
	Gables over end and cross walls ...	3×4×10 / 2		×1⅛ ...	...	67½
	Total superstructure burnt brick in clay. c. in ft.	...	...	...	...	1493½
	Deductions—					
	Doors ...	2	3	1⅛	6	40·5
	Windows ...	6	3	1⅛	4	81·0
	Lintel slabs of doors and windows ...	8	4½	1⅛	½	20·25
	Sill slabs for windows ...	6	4½	1⅛	½	15·19
	Wall plates ...	2	43⅜	⅓	¼	7·22
	Total deductions ...	...	...	...	...	164·2
	Total superstructure less deductions in c. ft.		...	...	...	1329 c. ft.
4	STONE SLABS FROM 4″ TO 4½″ THICK DRESSED.					
	Sills of doors and windows ...	8	4½	1⅛	...	40·5
	Lintels of doors and windows ...	8	4½	1⅛	...	40·5
	Steps ...	2×3	3	1	...	18·0
	Total burnt stone slabs in sq. ft. ...	...	—	...	...	99 s. ft.
5	CURB STONE FOR DRAIN 6″ CURB DRESSED AT TOP SEMICIRCULARLY.					
	Drains	2	3+2½	...	...	...
	Total of curb stone for drains in R. ft. ...	...	...	...	...	11 R. ft.

Probable cost of constructing a Health Camp as per plan attached—*contd.*

No	Details	No.	Dimensions			Contents
	WOOD WORK (Honnewood).					
6	Common rafters	2×24	$9\frac{1}{2}$	$\frac{1}{4}$	$\frac{1}{3}$	38·0
	Collar piece	1×24	6	$\frac{1}{4}$	$\frac{1}{3}$	12·0
	Wall plates	2	$46\frac{3}{8}$	$\frac{1}{4}$	$\frac{1}{3}$	7·7
	Total of Honnewood work in c.ft. ...	...	...	...	...	57·7 c. ft
	DOORS AND WINDOWS (BATTENED HONNEWOOD) WITH BOLTS, HINGES, ETC.					
7	Doors ...	2	3	6	...	36
	Windows ...	6	3	4	...	72
	Total of doors, and windows (Honnewood) in s.ft.	...	...	...	...	108 s. ft.
	MANGALORE TILES (2ND CLASS) ROOFING ON 1″ JUNGLE WOOD REEPERS.					
8	For the whole building	2	$46\frac{3}{8}$	$9\frac{1}{2}$		881
	Total of roofing with Mangalore tiles on 1″ J.W. reepers.	...	...	...	...	8·8 sqrs.
	RIDGE TILES(ORDINARY)FOR ROOFINGS SET IN MORTAR.					
9	For the whole building ...	1	$46\frac{3}{8}$	...	...	$46\frac{3}{8}$
	Total of ridge tiles for roofing in R.ft.	...	...	...	...	$46\frac{3}{8}$ R. ft.
	CEMENT POINTING TO BASEMENT.					
10	Longitudinal walls (External) ...	2	$43\frac{3}{8}$	2	...	173·5
	Side walls do ...	2	$12\frac{1}{4}$	2	...	49·0
	Side of steps ...	2	2	$1\frac{1}{2}$	...	6·0
	(Deductions omitted to cover up the cost of pointing the face of steps).	...	...	...	...	...
	Total cement pointing to basement in Sqrs.	...	...	...	...	228·5 sqrs
	CHUNAM PLASTERING OUTSIDE (FINE)					
11	Longitudinal walls (up to gable) ...	2	$43\frac{3}{8}$	...	10	867·50
	Side walls do ...	2	$12\frac{1}{4}$	...	10	245·00
	Gable portion ..	$20\times9\frac{1}{2}$	$\times\frac{1}{2}\times\frac{49}{4}$	...	...	55·125
	Total chunam plastering ..	...	...	...	...	11·7
	Deductions.—					
	Doors ...	2	3	...	6	36
	Windows ...	6	3	...	4	72
	Lintels over doors ...	2	$4\frac{1}{2}$	...	$\frac{1}{3}$	3
	Sills and lintels over windows ...	2×6	$4\frac{1}{2}$	...	$\frac{1}{3}$	18
	Total deductions ...	...	...	...	...	1·29
	Total chunam plastering less deductions in sqrs.	...	...	...	...	10·4 sqrs
	MUD PLASTERING (INSIDE THE BUILDING).					
12	Longitudinal walls ...	2×2	20	$10\frac{5}{8}$	...	850·0
	Side and cross walls ...	2×2	10	$10\frac{5}{8}$	...	425·0
	Gables ...	2×2	$\times\frac{10}{2}\times4$	...	...	80·0
	Screen walls ...	2	$14\frac{3}{4}$	6	...	177·0
	Do top ...	2	7	$\frac{3}{4}$	...	10·5
	Total mud plastering in sqrs. ...	...	...	...	...	15·42 sqrs.

Probable cost of constructing a Health Camp as per plan attached.—*concld.*

No.	Details	No.	Dimensions			Contents
	CHOCOLATE PAINTING (2 COATS ON WHITE LEAD).					
13	Doors ...	2×2		6	...	72
	Windows ...	2×6	3	4	...	144
	Total chocolate painting in sqrs. ...	...	...	...	..	2·16 sqrs.
	FLOORING WITH 3″ CONCRETE AND 1″ CEMENT PLASTERING.					
14	For the whole building ...	2	20	10	...	400
	Deductions.—					
	Screen walls ...	2	7	¾	..	10·5
	Portions occupied by curb stones ...	2	5½	½	...	5·5
	Total deductions in sqrs. ...	...	...	...	...	16·0
	Total flooring less deductions in sqrs.	...	...	...	...	3·84 sqrs.
	WOOD OILING TO JUNGLE WOOD WORK.					
15	Rafters ...	2×24	9½	1⅙	...	5·32
	Collar piece ...	24	6	1⅛	...	1·68
	Wall plates ...	2	46⅜	1⅙	...	1·08
	Total wood oiling to Jungle wood work in sqrs.	...	...	...	...	8·1 sqrs
	WHITEWASHING, 2 COATS					
16	As per mud and.					15·42 ...
	chunam plasterings	...	...	...	...	10·40 ...
		...	...	...	...	25·8 sqrs.

ABSTRACT.

Items	Per	Rate	Quantity	Amount
1. Earthwork excavation and filling in base.	1,000 c.ft.	9 0 0	520	4 10 11
2. Burnt stone in clay for foundation and basement.	100 cft.	20 0 0	907	181 6 5
3. Burnt brick in clay for superstructure.	cft.	0 2 6	1,329	207 10 6
4. Stone slab, dressed, from 4″ to 6″ thick.	sft.	0 4 0	99	24 12 0
5. Curb stone for drain 6″ cube, dressed at top semicircular.	Rft.	0 8 0	11	5 8 0
6. Honnewood work wrought and put up.	cft.	2 4 0	58	130 8 0
7. (a) Doors (battened, Honnewood) wrought and put up, complete with hinges, bolts, etc.	sft.	1 0 0	36	36 0 0
(b) Windows do do do	sft.	1 4 0	72	90 0 0
8. Roofing with Mangalore tiles (2nd class) on 1″ Jungle wood reepers.	sqrs.	23 0 0	8·8	202 6 5
9. Ridge tiles set on mortar ...	Rft.	0 4 0	46	11 8 0
10. Cement pointing to basement ...	sqrs.	3 8 0	2·29	8 0 3
11. Chunam plastering (outside) fine	do.	2 8 0	10·4	26 0 0
12. Mud plastering (inside) ...	do.	0 12 0	15·4	11 9 0
13. Painting with chocolate colour 2 coats on white lead for doors and windows.	do.	2 8 0	2·16	5 6 5
14. Flooring with 3″ concrete and 1″ cement plastering.	do.	4 0 0	3·84	15 5 9
15. Wood oiling to jungle wood work	do.	2 0 0	8	16 0 0
16. White washing (2 coats)	do.	0 3 6	25·8	5 10 4
Clearing site—Lump sum	...	.....	...	8 0 0
Total	...	.....	...	990 0 0
Add contingency	...	... 2% ...	...	20 0 0
Grand Total (Roughly)	...	... ...	...	1,010 0 0

N.B.—This estimate does not take into consideration the fluctuation of the market rate in tl prices of materials.

Letter No G. C. 434—2, dated the 28th May 1918, from the Sanitary Commissioner in Mysore, to the Presidents, District and Municipal Boards.

ಸರ್ 1918ನೆ ಇಸವಿ ಏಪ್ರಿಲ್ 9ನೆ ಮೆಮ್ಕುಂ 5730–40 ಮ್ಯುನಿಸಿಪಲ್ 16–17–57ನೇ ನಂಬರಿನ ಗೌರ್ನಮೆಂಟ್ ಹುಕ್ಕುಂ ಪೇರಿಗೆ ಪ್ಲೇಗ್ ನಿವಾರಣೆಗಾಗಿ ಪ್ರತಿ ಮ್ಯುನಿಸಿಪಾಲಿಟಿಯಲ್ಲೂ ಯಾವ ಯಾವ ಏರ್ಪಾಟು ಮಾಡಬೇಕೆಂಬುವ ವಿಷಯ ತಮ್ಮ ಪರಾಮರಿಕೆ ಬಗ್ಗೆ ಈ ಕೆಳಗೆ ಕಂಡಂತೆ ನಮೂದಿಸಿದೆ.

2 ಹಿಂದೆ ಅನೇಕಾವರ್ತಿ ಸೂಚಿಸಿರುವಂತೆ ಪ್ಲೇಗ್ ರೋಗವನ್ನು ಹದ್ದಿಗೆ ತರಬೇಕಾದರೆ ಇಲಿಗಳು ಸಾಯುವ ತರುಣದಲ್ಲಿಯೇ ಏನುಮಾಡಬೇಕೊ ಅದಕ್ಕೆ ಬೇಕಾಗುವ ಸಲಕರಣೆಗಳನ್ನು ಸಿದ್ಧಪಡಿಸಿಕೊಂಡಿರುವುದು ಮುಖ್ಯಾಂಶವಾಗಿರುತ್ತದೆ.

ಇಲಿಗಳು ಸತ್ತವಡನೆಯೆ ಸ್ಥಳೀಯ ಅಧಿಕಾರಿಗಳಿಗೆ ರಿಪ್ಪೋರ್ಟು ಬಂದರೆ ಮುಂದೆ ನಡಿಸತಕ್ಕ ಕ್ರಮವು ಸುಲಭವಾಗಿ ಸಫಲವೂ ಆಗುವುದು. ಇದಕ್ಕಾಗಿ ಮತ್ತೊಂದು ಹೊಸ ಕಾನೂನನ್ನು ಜಾರಿಗೆ ತರುವುದು ಸಾಧ್ಯವಾಗಿ ತೋರುವುದಿಲ್ಲ. ಜನರಿಗೆ ತಿಳುವಳಿಕೆ ಹೇಳುವುದರಮೂಲಕ ಎಷ್ಟಾಕ್ರಮವಾಗಿ ಜನರೇ ರಿಪ್ಪೋರ್ಟು ಮಾಡುವುದು ರೂಢಿಗೆ ಬರಬೇಕು. ಮನೆಯನ್ನು ಬಿಡುವುದಕ್ಕೆ ಸಿಬ್ಬಂಧಿವಾದೀತೆಂಬ ಭಯದಿಂದ ಇಲಿಗಳು ಸಾಯುವ ವಿಷಯವನ್ನು ಜನರು ಮುಚ್ಚಿಡುವರು. ಈ ಭಯವು ಹೋಗುವಂತೆ ಅಧಿಕಾರಿಗಳು ಪದೇಪದೆ ತಿಳುವಳಿಕೆ ಹೇಳುತ್ತಿರುವದು ಅತ್ಯವಶ್ಯಕ. ಸತ್ತ ಇಲಿಗಳನ್ನು ಬೀದಿಯಲ್ಲಿ ಬಿಸಾಡಿದ್ದರೆ ಸ್ಥಳೀಯ ಸ್ಯಾನಿಟರಿ ಇನ್ಸ್ಪೆಕ್ಟರಾಗಲಿ ಇತರ ಮ್ಯುನಿಸಿಪಲ್ ನೌಕರರಾಗಲಿ ತಕ್ಷಣವೇ ರಿಪ್ಪೋರ್ಟು ಮಾಡತಕ್ಕದ್ದು. ಇಂಥಾ ಇಲಿಗಳು ಸತ್ತ ಬೀದಿಗಳಲ್ಲಿನ ಮನೆಗಳನ್ನು ಖಾಲಿಮಾಡಿಸಿ ತಕ್ಷಣವೇ ಡಿಸಿನ್‌ಫೆಕ್ಷ್ಟ್ ಮಾಡಿಸಬೇಕು.

3. ಇಲಿಗಳು ಸತ್ತ ಮನೆಗಳನ್ನೂ ಅಜಾಬಾಜು ಮನೆಗಳನ್ನೂ ಸಾವಕಾಶವಿಲ್ಲದೆ ಖಾಲಿಮಾಡಲು ಅನುಕೂಲಿಸುವಂತೆ ಪ್ರತಿ ಊರಿನಲ್ಲಿಯೂ ಕೆಲವು ಷೆಡ್ಡುಗಳನ್ನು ಚನ್ನಾಗಿ ಕಟ್ಟಿಸಿ ಇಟ್ಟಿರುವದು ಬಹಳ ಆವಶ್ಯಕ. ಇವುಗಳಲ್ಲಿ ಸೋಂಕಿನ ಮನೆಯಿಂದ ಬಂದವರು ಇರುವುದಕ್ಕೆ ಷಷ್ಡುಗಳು ಪ್ರತ್ಯೇಕಿಸಿರಬೇಕು. ಬಂದು ಊರಿಗೆ ಎಷ್ಟು ಷೆಡ್ಡುಗಳು ಇರಬೇಕೆಂಬುದನ್ನು ನಾನು ನಿರ್ಧರಿಸಿ ಹೇಳುವುದು ಸಾಧ್ಯವಲ್ಲ. ಹಣವು ಎಷ್ಟು ಬದಗಬಹುದೋ ಜನಜಂಖ್ಯೆ ಎಷ್ಟೊ ಮತ್ತು ಪ್ಲೇಗು ರೋಗವು ವರ್ಷೇ ವರ್ಷೆ ಬರುವದೊ ಎಂಬ ಅಂಶಗಳನ್ನು ತಿಳಿದು ಷೆಡ್ಡುಗಳ ಸಂಖ್ಯೆಯನ್ನು ನಿರ್ಧರಿಸಬೇಕು. ಷೆಡ್ಡಿನ ಪ್ಲಾನ್ ಮತ್ತು ಲಾಗುವಡಿನ ಅಂದಾಜಾ ಪಟ್ಟಿಯನ್ನು ಇದಕ್ಕೆ ಲಗತ್ತಿಸಿರುತ್ತೇನೆ. ಷೆಡ್ಡುಗಳು ಶಿಥಿಲವಾಗದಂತೆ ಬಂದೋಬಸ್ತಿನಿಂದ ಕಟ್ಟಿಸಿ ಉಸ್ತುವಾರಿ ನೋಡಿಕೊಳ್ಳುವುದಕ್ಕೆ ಸಿಬ್ಬಂದಿಯನ್ನು ನೇಮಿಸುವುದು ಅವಶ್ಯಕ.

4. ಯಾವ ಮನೆಯಲ್ಲಾದರೂ ಸತ್ತ ಇಲಿಗಳು ಕಂಡುಬಂದಾಗ ತಕ್ಷಣ ಆ ಮನೆಯನ್ನೂ ಅಜಾಬಾಜಾ ಮನೆಗಳನ್ನೂ ಬಿಡಿಸಿ, ಬಿಡಿಸಿದ ಜನರಿಗಾಗಿ ಷೆಡ್ಡುಗಳನ್ನು ಬಿಡುವುಮಾಡಿಸಿಕೊಡಬೇಕು. ಹತ್ತು ದಿವಸಗಳಿಗೆ ಮಿಾರಿ ಷೆಡ್ಡಿನಲ್ಲಿ ವಾಸಮಾಡುವುದು ಅನಾವಶ್ಯಕ. ಈ ಹತ್ತು ದಿವಸಗಳೊಳಗಾಗಿ ಸೋಂಕು ತಗಲಿದ ಮನೆಗಳನ್ನು ಎರಡಾವರ್ತಿ ಚೆನ್ನಾಗಿ ಡಿಸಿನ್‌ಫೆಕ್ಷ್ಟ್ ಮಾಡಿಸಿ, ಷೆಡ್ಡಿನಲ್ಲಿರತಕ್ಕವರನ್ನು ಪುನಹ ಮನೆಗಳಿಗೆ ವಾಪಸು ಕಳುಹಿಸಬಹುದು.

5. ಪ್ರಜಾಸಂಖ್ಯೆ 5,000 ಅಥವ ಜಾಸ್ತಿ ಇರತಕ್ಕ ಊರುಗಳಲ್ಲೆಲ್ಲಾ ಪ್ಲೇಗು ಮುಂತಾದ ರೋಗ ಬಂದವರಿಗೆ ಚಿಕಿತ್ಸೆ ಮಾಡುವುದಕ್ಕೆ ಪ್ರತ್ಯೇಕ ಆಸ್ಪತ್ರೆಯನ್ನು ಏರ್ಪಡಿಸಬೇಕು. ಇದು ಸರ್ಕಾರಿ ಆಸ್ಪತ್ರೆಗೆ ಬಹಳ ಸಮಿಾಪವಾಗಿದ್ದರೆ ಡಾಕ್ಟರು ನೋಡಿಕೊಳ್ಳಲು ಅನುಕೂಲವಿರುತ್ತೆ. ಈ ಆಸ್ಪತ್ರೆಯಲ್ಲಿ ಎಷ್ಟು ಜನ ರೋಗಿಗಳಿಗೆ ಸ್ಥಳವಿರಬೇಕೆಂಬ ವಿಷಯವು ಊರಿನ ಪ್ರಜಾಸಂಖ್ಯೆಗನುಗುಣವಾಗಿ ನಿರ್ಧರಿಸಬೇಕು. ಬಂದು ವೇಳೆ ರೋಗಪ್ರಾಬಲ್ಯದಿಂದ ಯಾವುದಾದರೂ ಬಂದು ವರುಷ ಹೆಚ್ಚು ರೋಗಿಗಳಿಗೆ ಸ್ಥಳವನ್ನು ಏರ್ಪಡಿಸಬೇಕಾದರೂ ಹಂಗಾಮಿಯಾಗಿ ಷೆಡ್ಡುಗಳನ್ನು ಕಟ್ಟಿ ಉಪಯೋಗಿಸಿಕೊಳ್ಳಬಹುದು. ಊರು ಸಣ್ಣದಾದ ಪಕ್ಷ ನಾಲ್ಕು ಜನಗಳಿಗೆ ಸಾಕಾಗುವಷ್ಟು ಬಂದು ಕಟ್ಟಡವಿರಬೇಕು.

6. ಊರಿನಲ್ಲಿರುವ ಡಿಸ್ಪೆನ್ಸರಿ ಮೆಡಿಕಲ್ ಆಫೀಸರ್ ವಶದಲ್ಲಿಯೇ ಪ್ಲೇಗ್ ಆಸ್ಪತ್ರೆಯನ್ನು ಇಡಬಹುದು. ರೋಗ ಬಹಳವಾಗಿ ವ್ಯಾಪಿಸಿದ ವರುಷದಲ್ಲಿ ಇವರ ಸಹಾಯಕ್ಕಾಗಿ ಮತ್ತೊಬ್ಬ ಡಾಕ್ಟರನ್ನು ಕರೆಯಿಸಿಕೊಳ್ಳುವ ಏರ್ಪಾಡು ಮಾಡಬಹುದು.

7. ಡಿಸಿನ್‌ಫೆಕ್ಷ್ಟ್ ವಿಚಾರವಾಗಿ ಮನೆಗಳನ್ನು ತಿಂಗಳಾರುಗಟ್ಟಲೆ ಬಿಟ್ಟು ವಾಪಸುಬರುವವರೆಗೆ ಶುದ್ಧಿಮಾಡಿಸದೆ ಇರುವ ಪದ್ಧತಿಯನ್ನು ತಪ್ಪಿಸಬೇಕು. ಸಾಧಾರಣವಾಗಿ ಇಲಿಯಮೇಲಿನ ಚಿಗಟದ ಮೂಲಕ

ರೋಗದ ಸೋಂಕು ವ್ಯಾಪಿಸುವುದೆಂದುನ್ನೂ ಈ ಚಿಗಟವನ್ನು ಸುಲಭೋಪಾಯವಾಗಿ ಎಂದರೆ ಬೆಂಕಿ ಉರಿಸುವ ಶಾಖದಿಂದ ನಾಶಪಡಿಸಬಹುದೆಂದುನ್ನೂ ನೆನಪಿಗೆ ತಂದುಕೊಂಡರೆ ಕಾಲವಿಳಂಬವಿಲ್ಲದೆ ಶಾಖದ ಮೂಲಕ ಡಿಸಿ೯ಫೆಕ್ಷ೯ ಮಾಡಿಸುವ ಅವಶ್ಯಕತೆಯು ವ್ಯೆಕ್ತವಾಗದಿರಲಾರದು. ಮನೆಯನ್ನು ಬಿಟ್ಟೊಡನೆಯೇ ಡಿಸಿ೯ಫೆಕ್ಷ೯ ಮಾಡಿಸಬೇಕು. ತರುವಾಯ ಹತ್ತು ದಿನಗಳೊಳಗಾಗಿ ಮತ್ತೊಂದು ಸಾರಿ ಮಾಡಿಸಬೇಕು. ಹೀಗೆ ಮಾಡಿಸಿದ ಮನೆಗಳಲ್ಲಿ ಪುನಃ ಸತ್ತ ಇಲಿಗಳೇನೂ ಕಾಣದಿದ್ದರೆ ಕೂಡ್ಲೆ ವಾಸಕ್ಕೆ ಯೋಗ್ಯವಾಗುವುವು. ಸೋಂಕಿನ ಚಿಗಟಗಳನ್ನು ಕೊಲ್ಲುವುದಕ್ಕೆ ಬೇಕಾಗುವಷ್ಟು ಬೆಂಕಿಯ ಶಾಖವನ್ನು ಉಂಟುಮಾಡುವುದಕ್ಕೆ ನೆಲ್ಲುಹುಲ್ಲು, ವೆಣಗಿದ ಎಲೆ ತರಗು ಇವೇ ಮುಂತಾದ ಸುಲಭವಾಗಿ ಹತ್ತಿ ಉರಿಯುವ ಯಾವ ಪದಾರ್ಥವನ್ನಾದರೂ ಉಪಯೋಗಿಸಬಹುದು. ಇಂಥಾ ಪದಾರ್ಥವನ್ನು ನೆಲದ ಮೇಲೆಲ್ಲಾ ಸಮವಾಗಿ ಹರಡಿ ಬೆಂಕಿ ಹತ್ತಿಸಿ ಬಾಗಿಲು ಕಿಟಿಕಿಗಳನ್ನು ಭದ್ರವಾಗಿ ಮುಚ್ಚಬೇಕು. ಇದಕ್ಕಾಗಿ ತರಬೇತಾದ ಸಿಬ್ಬಂದಿ ಇದ್ದರೆ ಉತ್ತಮ. ಸ್ಥಳೀಯ ಖಾಯಂ ಸಿಬ್ಬಂದಿಯಲ್ಲಿ ಇಬ್ಬರು ಮುನ್ಸೈರನ್ನು ಡಿಸಿ೯ಫೆಕ್ಷ೯ ಕೆಲಸದಲ್ಲಿ ತರಬೇತು ಮಾಡಿಸಿ, ಪ್ಲೇಗ್ ಕಾಲದಲ್ಲಿ ಇವರಿಂದ ಡಿಸಿ೯ಫೆಕ್ಷ೯ನನ್ನು ನಡೆಯಿಸಿ ದಿನಚರಿ ಕೆಲಸಕ್ಕಾಗಿ ಹಂಗಾಮಿ ಜನಗಳನ್ನು ನೇಮಿಸಬಹುದು. ಡಿಸಿ೯ಫೆಕ್ಷ೯ ಕೆಲಸದಲ್ಲಿದ್ದಾಗ ಮಾಹೇಯಾನಾ 5 ರೂಪಾಯಿನಂತೆ ಅಲೋಯ್೯ಸನ್ನು ಕೊಡಬಹುದು. ಈ ಏರ್ಪಾಡಿನಿಂದ ಡಿಸಿ೯ಫೆಕ್ಷ೯ಗಾಗಿಯೇ ಖಾಯಂ ಸಿಬ್ಬಂದಿಯನ್ನು ಇಟ್ಟುಕೊಳ್ಳುವ ಅವಶ್ಯಕತೆ ಇರುವದಿಲ್ಲ. ಒಂದು ವೇಳೆ ಹೆಚ್ಚು ಜನ ಬೇಕಾದಾಗ ಹಂಗಾಮಿಯಾಗಿ ಇಟ್ಟುಕೊಳ್ಳಬಹುದು.

8. ಇನಾಕ್ಯುಲೇಷ್ಯ ಮಾಡಿಸಿಕೊಳ್ಳುವುದರಿಂದ ರೋಗವು ಬರುವುದಿಲ್ಲವೆಂದು ಸರ್ವರಿಗೂ ತಿಳಿದೇ ಇರುವದರಿಂದ ಈ ವಿಷಯ ಹೆಚ್ಚಾಗಿ ಹೇಳಬೇಕಾದದ್ದೇನೂ ಇರುವುದಿಲ್ಲ. ಬೇಕಾದಾಗ ಇನ್ಯಾಕ್ಯುಲೇಷ್ಯ ಕೆಲಸಕ್ಕಾಗಿಯೇ ಒಬ್ಬ ಡಾಕ್ಟರನ್ನು ಒದಗಿಸುವ ಏರ್ಪಾಡು ಮಾಡಲಾಗುವುದು.

9. ಪ್ರತಿ ಸ್ಥಳದಲ್ಲಿಯೂ ಪ್ಲೇಗ್ ನಿವಾರಣೆಗಾಗಿ ಕಲಿಸಬೇಕಾದ ಅನುಕೂಲಗಳನ್ನು ಈ ಕೆಳಗೆ ಸಂಕ್ಷೇಪವಾಗಿ ವಿವರಿಸಿದೆ.—

(I) ಮೊತ್ತವಾಗಿ ಖರ್ಚು ತಗಲುವ ಬಾಬುಗಳು.—

(a) ಚನ್ನಾಗಿ ಕಟ್ಟಿದ ಪೆಡ್ಡುಗಳ ಸಮುದಾಯ.

(b) ಚನ್ನಾಗಿ ಕಟ್ಟಿದ ಪ್ಲೇಗು ಆಸ್ಪತ್ರೆ ಮತ್ತು ಇದಕ್ಕೆ ಬೇಕಾಗುವ ಮಂಚಗಳು, ಇತರ ಸಾಮಾನುಗಳೂ.

(II) ವರ್ಷವರ್ಷ ಖರ್ಚಿಡಬೇಕಾದ ಬಾಬುಗಳು.–

(a) ಪೆಡ್ಡುಗಳ ಉಸ್ತುವಾರಿಗಾಗಿ ಸಿಬ್ಬಂದಿ.

(b) ಡಿಸಿ೯ಫೆಕ್ಷ೯ ಸಿಬ್ಬಂದಿ

(c) ಡಿಟೊ ಪ್ಲೇಗ್ ಆಸ್ಪತ್ರೆಗಾಗಿ ಒಬ್ಬ ಜವಾನ.

(d) ಔಷಧ ಪಥ್ಯಗಳ ಖರ್ಚು.

10. ಈ ವಿಷಯಗಳನ್ನು ಸ್ಥಳೀಯ ಅಧಿಕಾರಿಗಳ ಪರ್ಯಾಲೋಚನೆಗೆ ತರಬೇಕಾಗಿ ಬೇಡುತ್ತೇನೆ. ಇವೆರುಗಳು ವಹಿಸುವದಕ್ಕೆ ಸಾಧ್ಯವಾಗುವ ಖರ್ಚಿನ ಅಂದಾಜಾ ಪಟ್ಟಿಯನ್ನು ರವಾನಿಸಿದರೆ ಅವಶ್ಯವಿದ್ದಲ್ಲಿ ಪ್ಲೇಗ್ ಫಂಡಿನಿಂದ ಕೊಡಬಹುದಾದ ಗ್ರಾಂಟು ವಿಷಯವಾಗಿ ಗೌರ್ನಮೆಂಟಿಗೆ ಬರೆಯಲು ಸಿದ್ಧವಾಗಿರುತ್ತೇನೆ.

11. ಮುಖ್ಯವಾಗಿ, ಮನೆಗಳಲ್ಲೂ ಅಂಗಡಿಗಳಲ್ಲೂ ಇಲಿಯು ಸೇರದಿರುವಂತೆ ಮ್ಯುನಿಸಿಪಲ್ ರೆಗ್ಯುಲೇಷ್ಯ ಅನುಸರಿಸಿ ಕಟ್ಟಡಗಳಿಗೆ ಸಂಬಂಧಪಟ್ಟ ರೂಲ್ಸನ್ನು ಜಾರೀಗೆ ತರುವುದರಲ್ಲೂ ಹೊಸದಾಗಿ ಊರು ಬಡಾವಣೆ ಮಾಡುವುದರಲ್ಲೂ ಪ್ರತಿ ಮ್ಯುನಿಸಿಪಾಲಿಟಿಯವರು ಉದ್ಯುಕ್ತರಾಗಿರಬೇಕು. ಇಲಿಗಳು ಸೇರಿ ಅಭಿವೃದ್ಧಿಯಾಗುವುದಕ್ಕೆ ಆಸ್ಪದ ವಿಲ್ಲದಂತೆ ಅಂಗಡಿ ಕಟ್ಟಡಗಳು ಕಟ್ಟಲ್ಪಡದಿದ್ದರೆ ದವಸ ಧಾನ್ಯಗಳನ್ನು ಶೇಖರಿಸಿ ಇಡುವದಕ್ಕೆ ಅಪ್ಪಣೆಯನ್ನು ಕೊಡಕೂಡದು.

ಎಂ. ಶ್ರೀನಿವಾಸರಾವ್,
ಸ್ಯಾನಿಟೆರಿ ಕಮಿಷನರ.

WD 1101—GPB—200—22 3-19

HEALTH CAMP FOR TWO FAMILIES

Scale 6′ = 1″.

PLAN

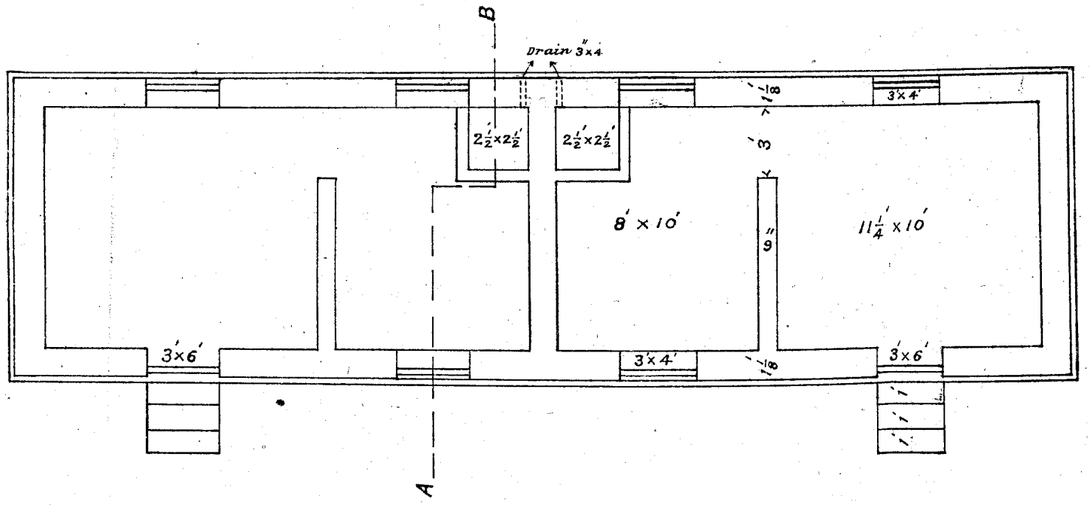

Cross Section on A.B.

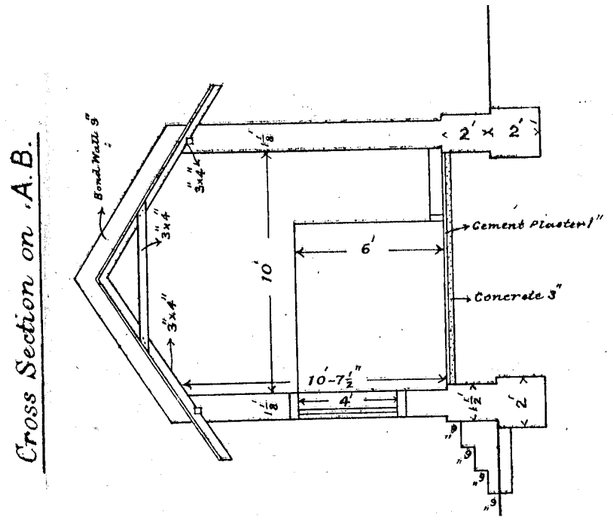

Elevation

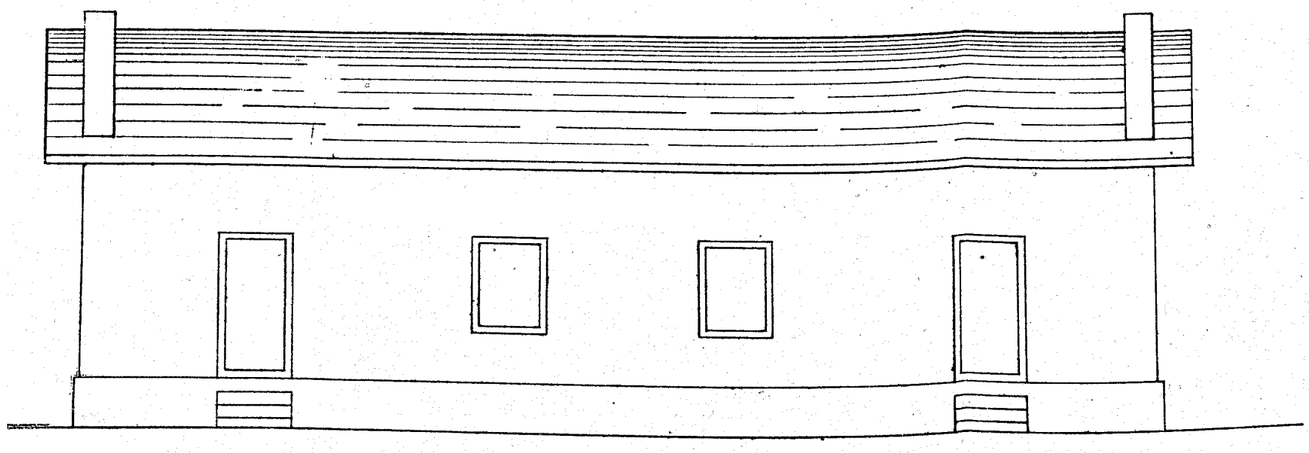

CONTACT SHED

Scale 6 1".

PLAN

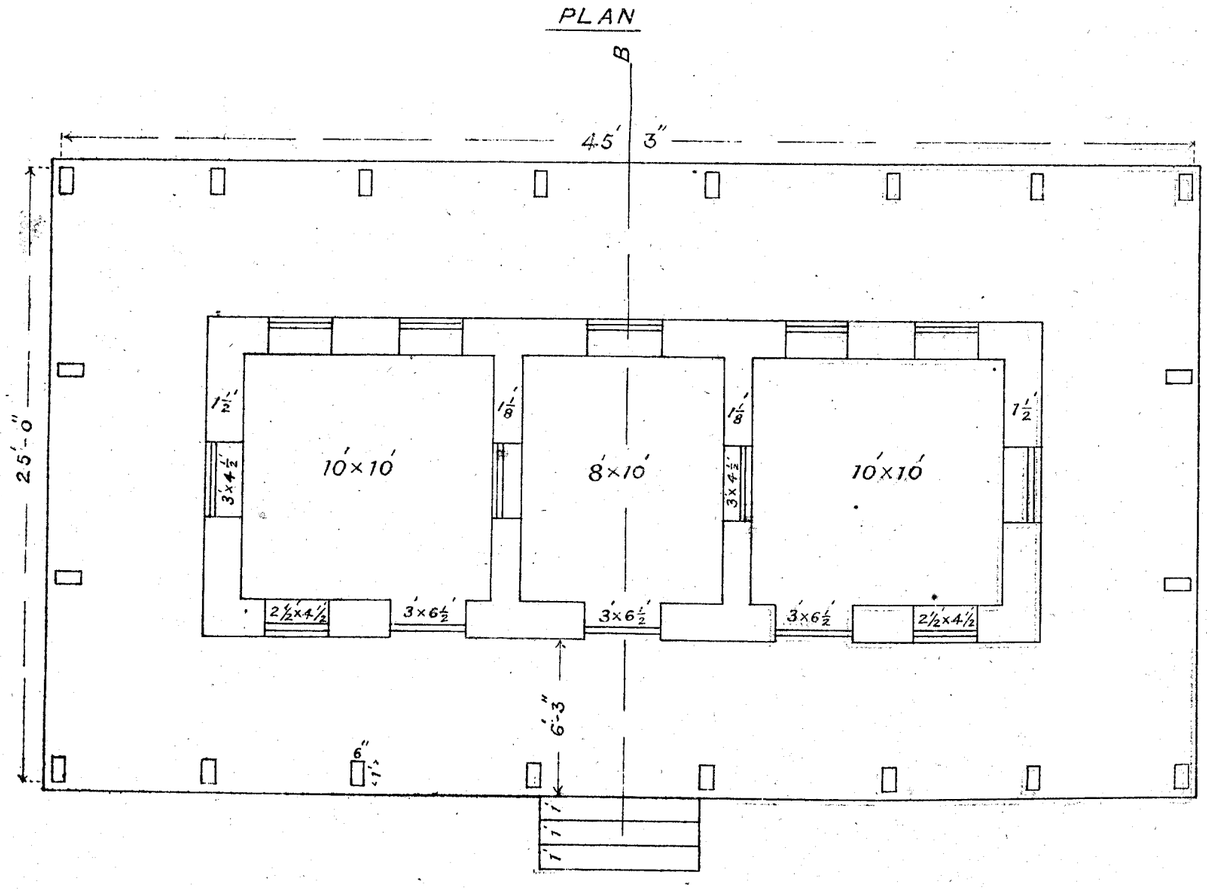

Cross Section on A.B.

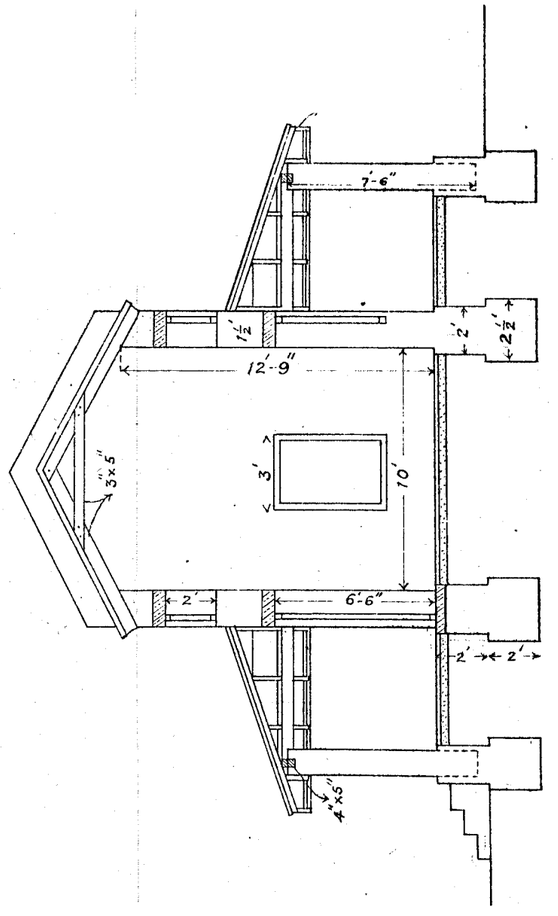

Elevation

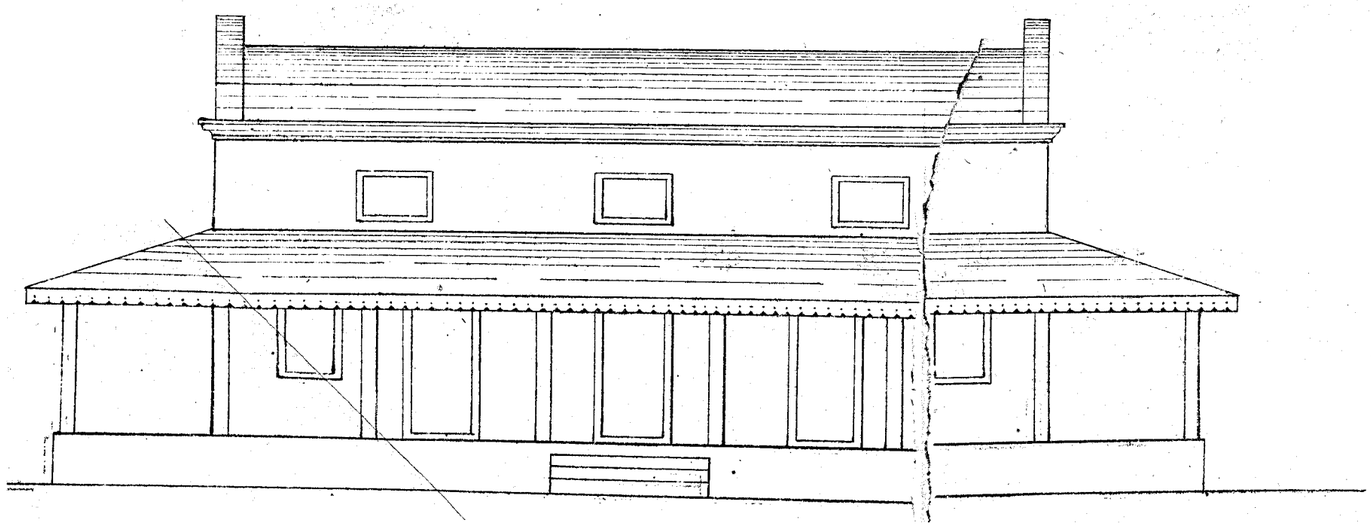

G. R. S. VI—G/32]

SUBJECT.....

.....

.....

Diary No. of letter replied to.....

GENERAL AND REVENUE SECRETARIAT

(

the *191*

Date of issue.....15/1.....

Signed by.....W. B.C.....

Section Sany.

File No. 37-11

Serial No. 10

No. G 1600 Envd 1SOC

To

The Sanitary Commissr

in Mysore

Sir,

With reference to correspondence ending with your letter no. G.C. 294 dated 26.11.1918 regarding type designs and estimates for health and contact sheds for towns in the ~~Bangalore district~~ State, I am directed to forward herewith 150 ~~200~~ printed copies of plans and estimates and to request ~~that you will~~

over.

~~will be so kind as~~ to circulate them to all District Boards and Taluk Head quarter municipalities in the ~~Province~~ State for necessary action. ~~Considering the question of providing health and camps in localities ~~will~~ infected by plague from District or municipal funds respectively.~~

I have etc.

12/12

for Sch. Secy.

M.P. 2.12.18 2/12

List of enclosures.

Copied by

Examined by

WD86—GPB—60,000—15-11-16